



AOTEVLED5/B

Otto Evo LED CCT Suspended Linear - 42W Cool White/Warm White - Black



Features

Architectural suspended linear for office, retail and educational applications

Slim profile available in white, aluminium and black finishes

Adjustable bracket system allows complete flexibility for mounting installation

Specially designed diffuser allows installer quick access to wiring ensuring a quick and easy installation

Selectable CCT between 3000K and 4000K output

Supplied bi-directional light output as standard (directional only option can be selected if required)

Suitable for individual or continuous suspension

Die-Cast aluminium end caps

Supplied c/w 1.5m suspension kit as standard

General Information


Lamp Type	LED
Colour / Finish	Black
IP Rating	IP20
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Suspended
Lifetime (Hrs)	L90 60,000
Warranty (Years)	5
CE Mark	Yes
Length (mm)	1560
Width (mm)	61
Accessories	AOTEVLED/90, AOTEVLED/90/W, AOTEVLED500, AOTEVLED1000, AOTEVLED1500

Technical Information

Wattage	42W
Lumens Delivered	4170lm (4000K)
Lm/W	99lm (4000K)
Beam Angle	110
CRI	Ra 80
CCT	3000/4000K
Input	220-240V
Hertz	50/60Hz
Operating Temp	0°C to 25°C
SDCM	3
UGR	23

Datasheet generated from <https://onetimepim.com> last updated Tuesday, July 5, 2022 2:23:24 PM



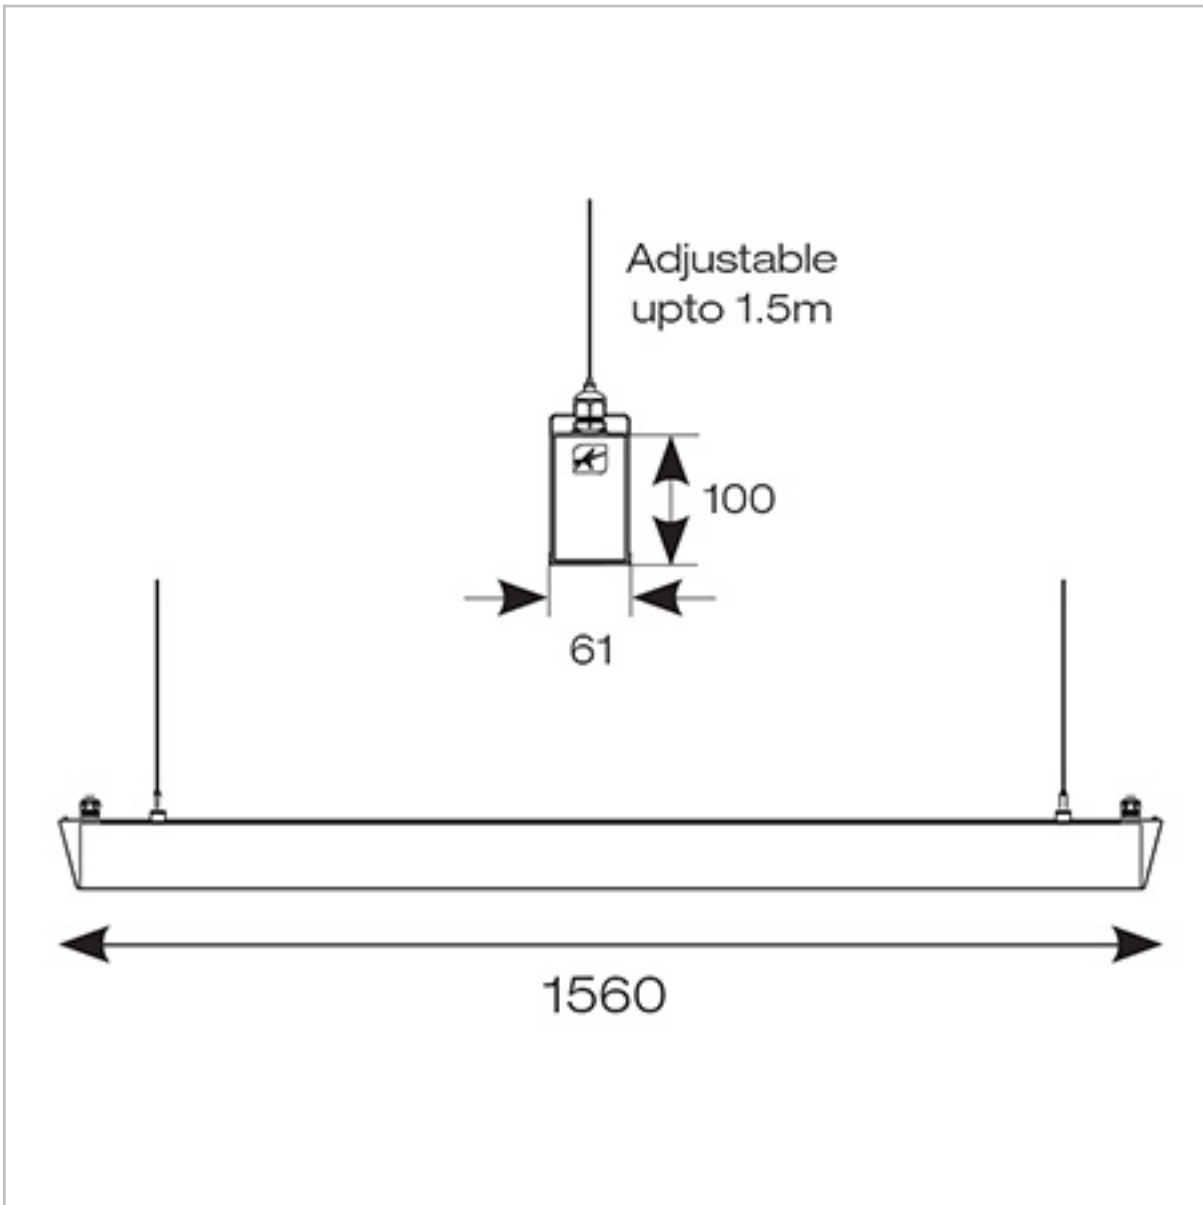



AOTEVLED2X5/B

Otto Evo LED CCT Suspended Linear - 66W Cool White/Warm White - Black



Features

Architectural suspended linear for office, retail and educational applications

Slim profile available in white, aluminium and black finishes

Adjustable bracket system allows complete flexibility for mounting installation

Specially designed diffuser allows installer quick access to wiring ensuring a quick and easy installation

Selectable CCT between 3000K and 4000K output

Supplied bi-directional light output as standard (directional only option can be selected if required)

Suitable for individual or continuous suspension

Die-Cast aluminium end caps

Supplied c/w 1.5m suspension kit as standard

General Information

Lamp Type	LED
Colour / Finish	Black
IP Rating	IP20
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Suspended
Lifetime (Hrs)	L90 60,000
Warranty (Years)	5
CE Mark	Yes
Length (mm)	1560
Width (mm)	61
Accessories	AOTEVLED/90, AOTEVLED/90/W, AOTEVLED500, AOTEVLED1000, AOTEVLED1500

Technical Information

Wattage	66W
Lumens Delivered	8030lm (4000K)
Lm/W	122lm (4000K)
Beam Angle	110
CRI	Ra 80
CCT	3000/4000K
Input	220-240V
Hertz	50/60Hz
Operating Temp	0°C to 25°C
SDCM	3
UGR	25

Datasheet generated from <https://onetimepim.com> last updated Tuesday, July 5, 2022 2:23:24 PM



