

Aquilo LST

Ladder Style Towel Rail

Curved

Low Surface Temperature (LST)

40, 80 and 90 W



p.104

Usage

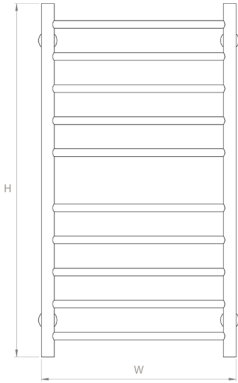
For use in bathrooms to provide dry warm towels.

Low surface temperature electric towel rails are ideal for applications where safety is paramount such as schools, hospitals, retirement homes and student accommodation.

Features and Benefits

- Stylish and modern curved ladder design
- Low surface temperature of below 43°C
- Low power rating reduces energy consumption
- High quality stainless steel
- Easy to clean finish
- Lightweight and easy to install
- Slimline profile
- Rapid heat up
- Robust mounting brackets included

Product Code	Power (W)	Timer	Current (amps)
AQ40LC	40	No	0.2
AQ80LC	80	No	0.4
AQ90LC	90	No	0.4

**Outer Casing**

Stainless steel, high polish

Controls

None

Safety

Overheat temperature protection.

IP Rating

IPX4

Installation

Wall mounting kit included and must be used.

Electrical Connection

Installation must comply with current IEE regulations.

The product should be connected to the fixed wiring of the property via a double pole fused spur with a minimum break capacity of 13 amps.

Cable pre-wired (1.5m), white cable entry to the bottom right of the towel rail.

Class I

Approvals

CE

Standard Warranty

1 year parts or replacement warranty.

Product Code	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
AQ40LC	720	400	120	2.4
AQ80LC	860	530	130	2.9
AQ90LC	1020	600	140	4