



ASPPLIED/ASY/CW

Spirit LED Asymmetrical Projector 24W - Cool White



Features

High performance LED projector light suitable for commercial applications

Die-cast aluminium construction with textured graphite finish

Non-dimmable

Internal application examples:- Transport hubs, churches and historical buildings amongst other commercial applications. Ideal to improve atmosphere and brighten indoor spaces

External application examples:- Commercial buildings to provide a sufficient wall washer effect for projected facades

Powered by Tridonic


General Information

Lamp Type	LED
Colour / Finish	Graphite
IP Rating	IP65
IK Rating	IK06
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L90 B50 36,000
Warranty (Years)	5
CE Mark	Yes
Width (mm)	230
Height (mm)	250
Depth (mm)	45

Technical Information

Wattage	24W
Lumens Delivered	1700lm
Lm/W	71lm
CRI	Ra 80
CCT	4000K
Input	230V
Hertz	50Hz
Operating Temp	0°C to 25°C
SDCM	3

Datasheet generated from <https://onetimepim.com> last updated Wednesday, June 15, 2022 8:51:37 AM

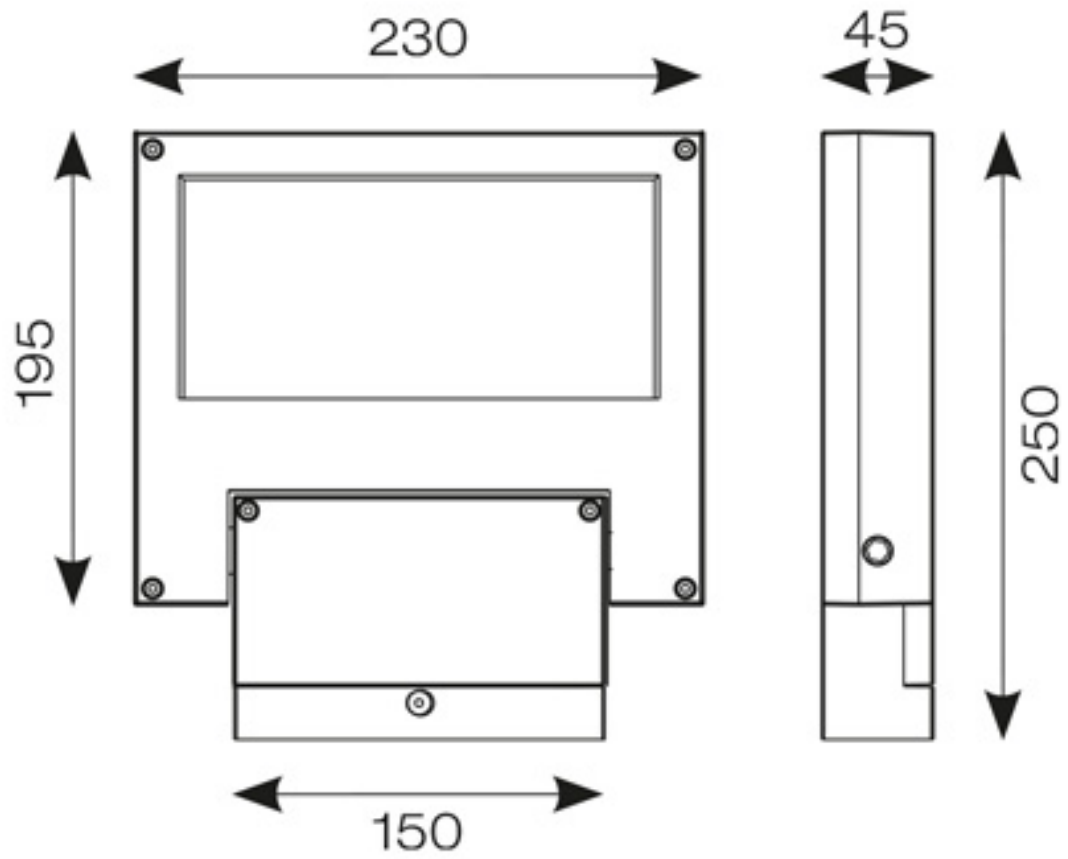



ASPPLIED/ASY/WW

Spirit LED Asymmetrical Projector 24W - Warm White



Features

High performance LED projector light suitable for commercial applications

Die-cast aluminium construction with textured graphite finish

Non-dimmable

Internal application examples:- Transport hubs, churches and historical buildings amongst other commercial applications. Ideal to improve atmosphere and brighten indoor spaces

External application examples:- Commercial buildings to provide a sufficient wall washer effect for projected facades

Powered by Tridonic


General Information

Lamp Type	LED
Colour / Finish	Graphite
IP Rating	IP65
IK Rating	IK06
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L90 B50 36,000
Warranty (Years)	5
CE Mark	Yes
Width (mm)	230
Height (mm)	250
Depth (mm)	45

Technical Information

Wattage	24W
Lumens Delivered	1600lm
Lm/W	66lm
CRI	Ra 80
CCT	3000K
Input	230V
Hertz	50Hz
Operating Temp	0°C to 25°C
SDCM	3

Datasheet generated from <https://onetimepim.com> last updated Wednesday, June 15, 2022 8:51:37 AM

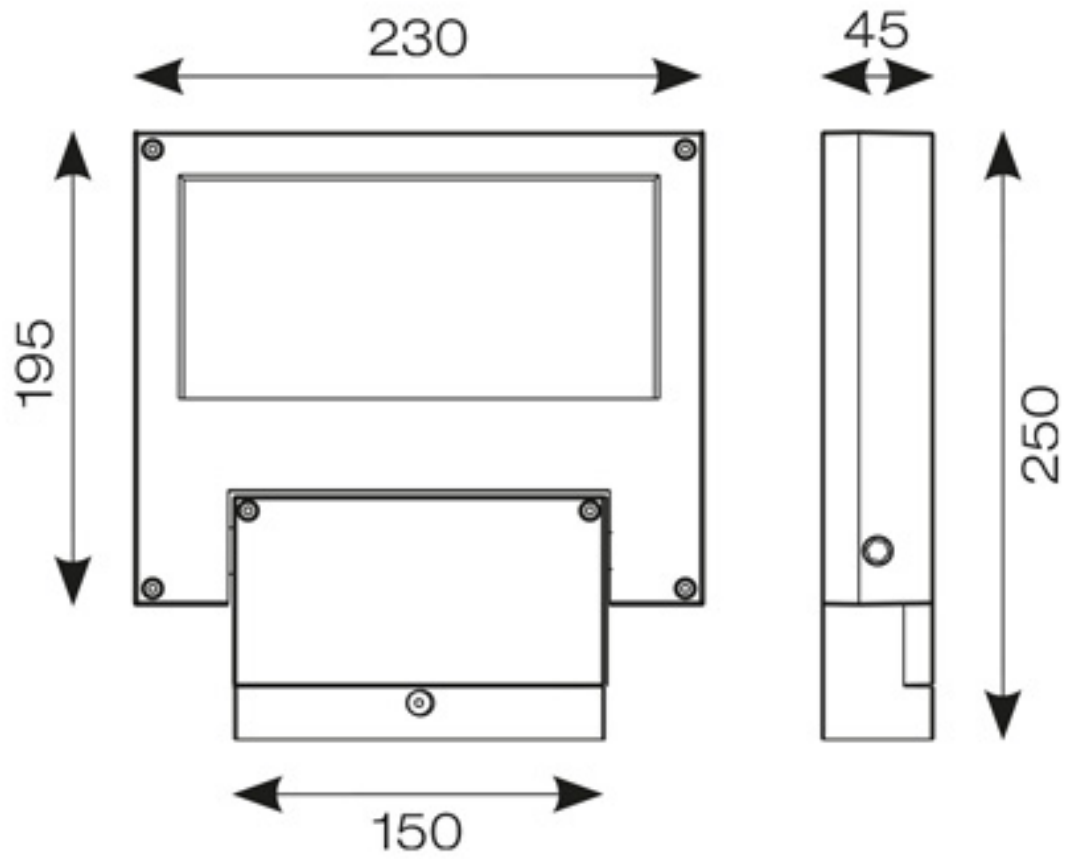



ASPPLIED/SYM/WW

Spirit LED Symmetrical Projector 24W - Warm White



Features

High performance LED projector light suitable for commercial applications

Die-cast aluminium construction with textured graphite finish

Non-dimmable

Internal application examples:- Historical buildings, churches and hotel lobbies. Ideal at improving atmosphere and brightening indoor spaces

External application examples:- Communal and residential gardens, ideal for illuminating landscapes providing a sufficient floodlight effect


Powered by Tridonic

General Information

Lamp Type	LED
Colour / Finish	Graphite
IP Rating	IP65
IK Rating	IK06
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L90 B50 36,000
Warranty (Years)	5
CE Mark	Yes
Width (mm)	230
Height (mm)	250
Depth (mm)	45

Technical Information

Wattage	24W
Lumens Delivered	1975lm
Lm/W	83lm
Beam Angle	65
CRI	Ra 80
CCT	3000K
Input	230V
Hertz	50Hz
Operating Temp	0°C to 25°C
SDCM	3

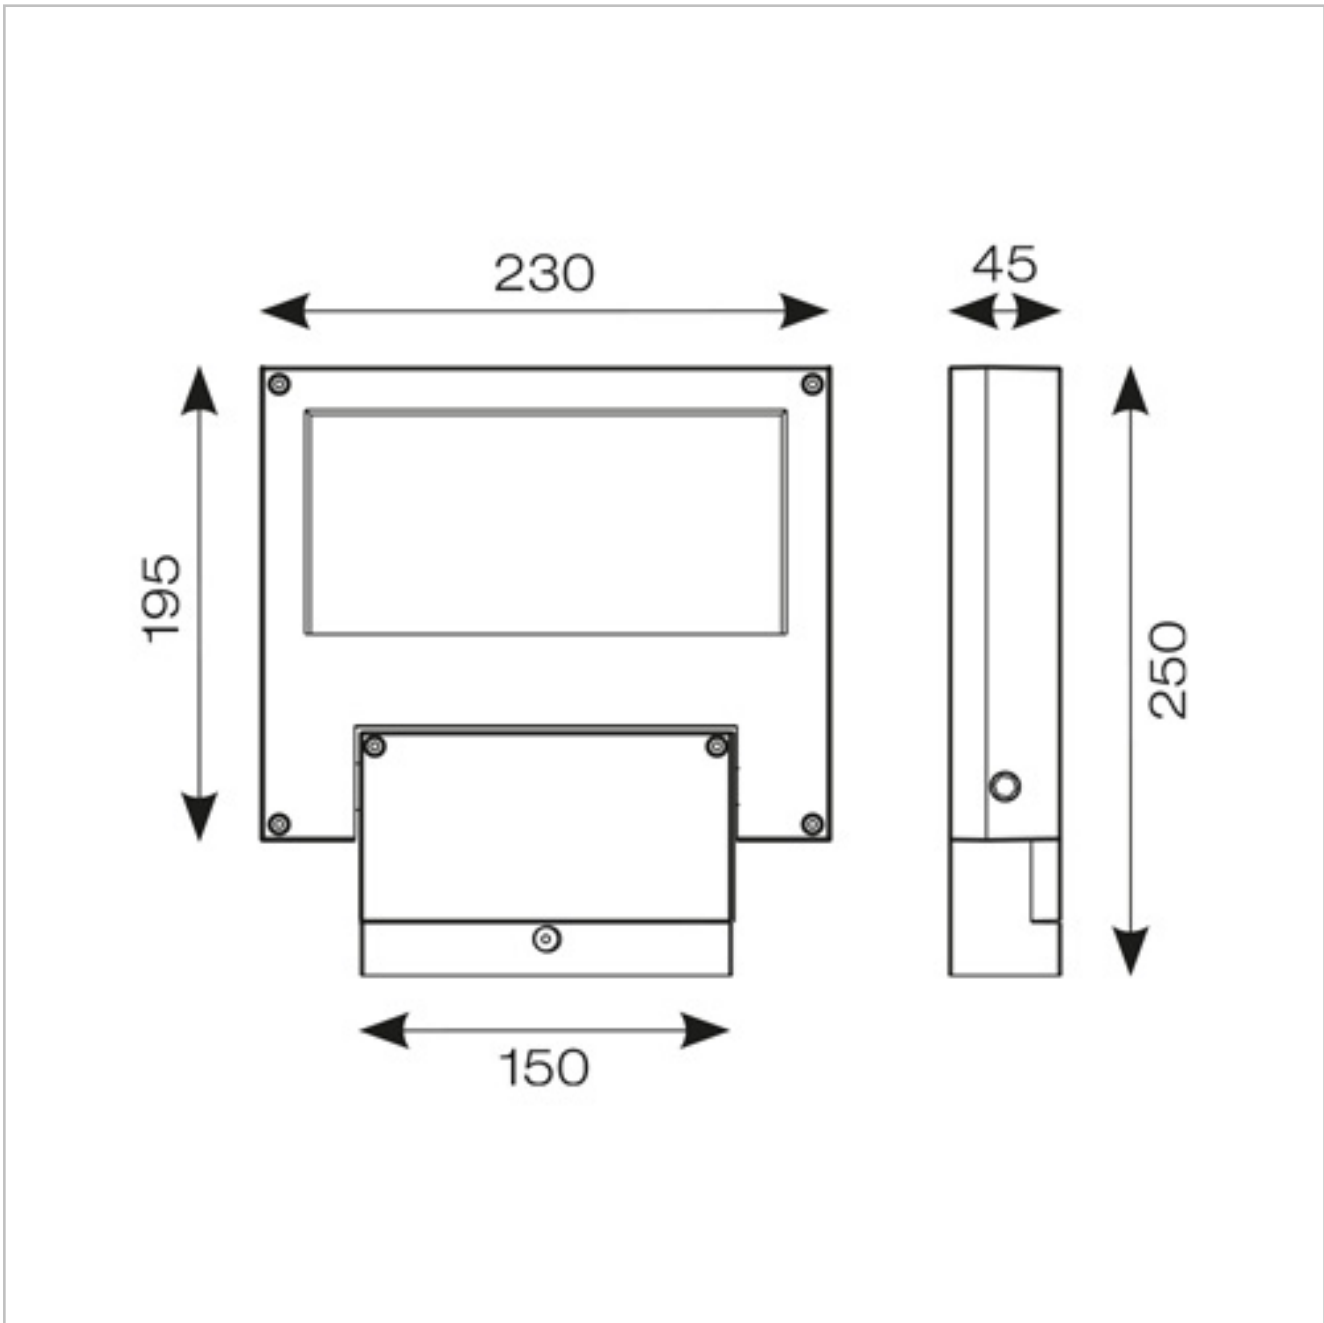

Datasheet generated from <https://onetimepim.com> last updated Wednesday, June 15, 2022 8:51:37 AM



ASPPLIED/SYM/CW

Spirit LED Symmetrical Projector 24W - Cool White



Features

High performance LED projector light suitable for commercial applications

Die-cast aluminium construction with textured graphite finish

Non-dimmable

Internal application examples:- Historical buildings, churches and hotel lobbies. Ideal at improving atmosphere and brightening indoor spaces

External application examples:- Communal and residential gardens, ideal for illuminating landscapes providing a sufficient floodlight effect


Powered by Tridonic

General Information

Lamp Type	LED
Colour / Finish	Graphite
IP Rating	IP65
IK Rating	IK06
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L90 B50 36,000
Warranty (Years)	5
CE Mark	Yes
Width (mm)	230
Height (mm)	250
Depth (mm)	45

Technical Information

Wattage	24W
Lumens Delivered	2150lm
Lm/W	90lm
Beam Angle	65
CRI	Ra 80
CCT	4000K
Input	230V
Hertz	50Hz
Operating Temp	0°C to 25°C
SDCM	3

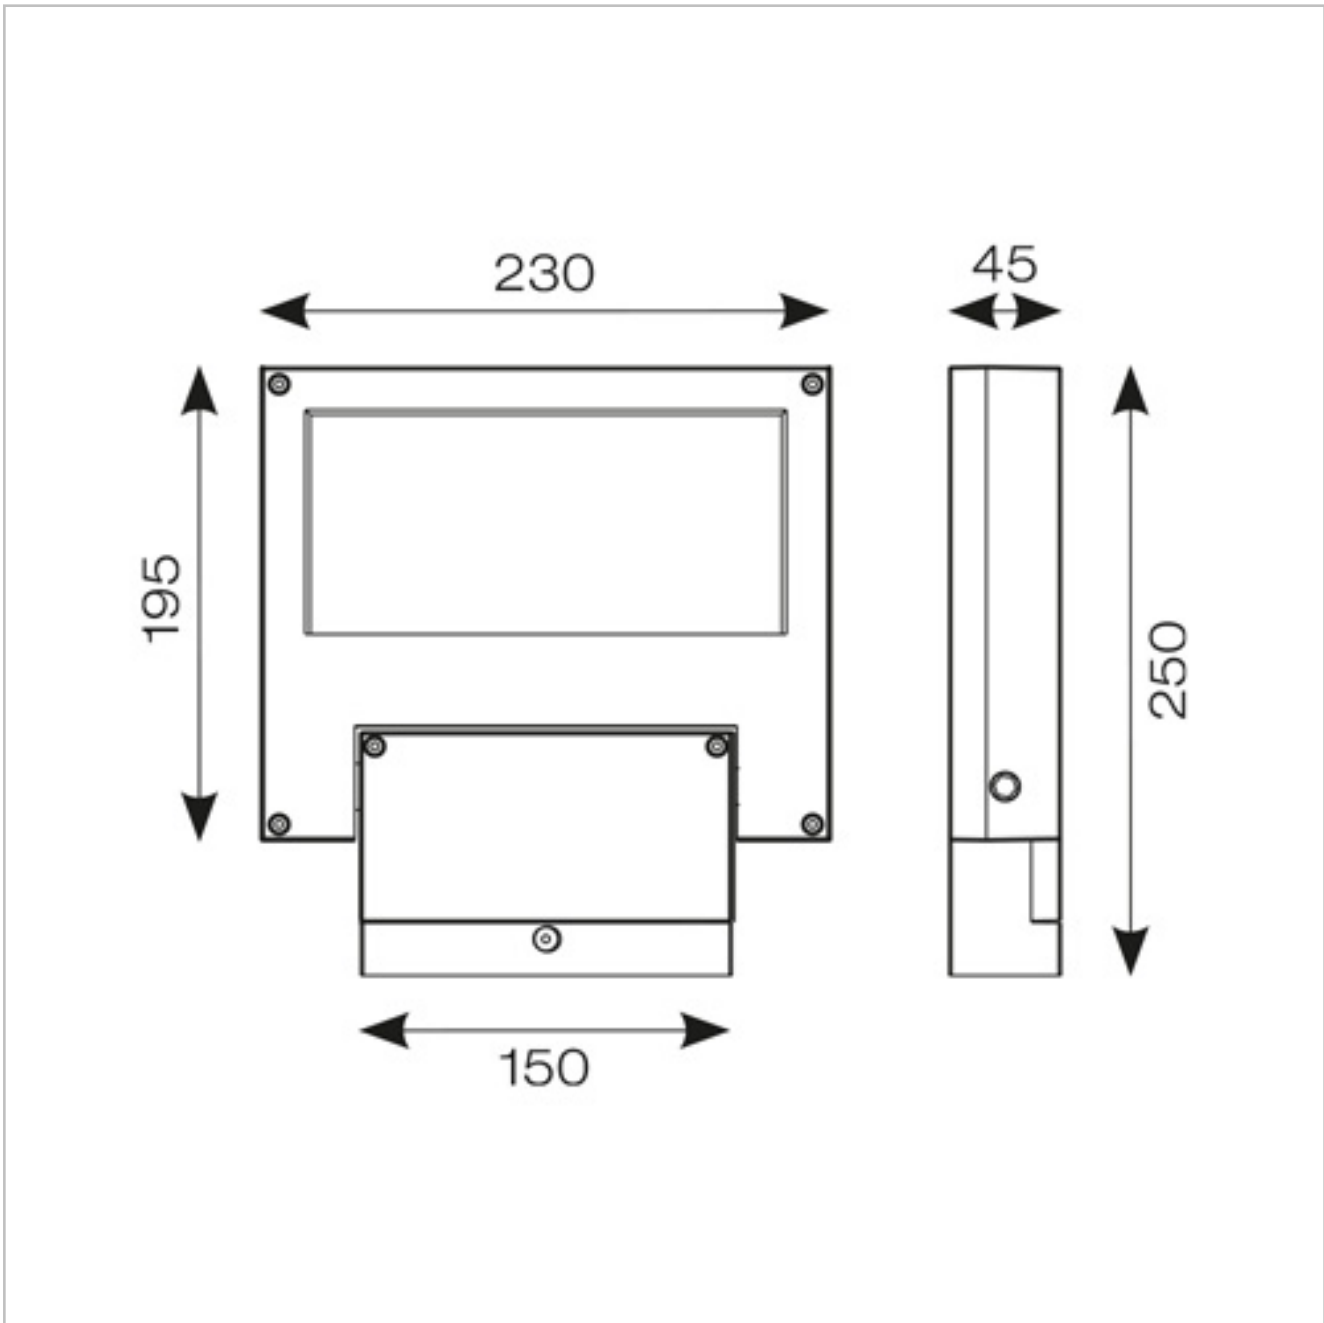

Datasheet generated from <https://onetimepim.com> last updated Wednesday, June 15, 2022 8:51:37 AM