


Technical Specification

Product Code: CMA30651

Description: 13A Zigbee Smart Switched Fused Connection Unit

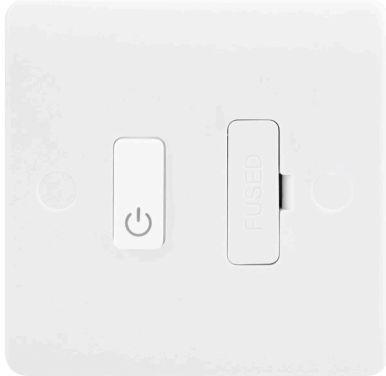

General Information

Dimensions (mm)	86 (W) x 86 (H) x 9 (D)	
Dimensions With Gasket (mm)	86 (W) x 86 (H) x 20.5 (D)	
Plate Fixing Centres - Horizontal (mm)	60.3	
Style	Rounded Profile	
Finish	Polar White	
Gasket Colour	Polar White	
Materials	Front Plate: Urea Terminals: Brass Internal Busbars: Formed Pressed Brass Gasket: Polycarbonate	Rear Housing: Nylon Terminal Screws: Steel & Yellow Passivated Electronics: PCB & Electronic Components
Rated Voltage (V~) (Ue)	240	Frequency (Hz) 50
Resistive Load Rating (A)	13	
Fuse Fitted Rating & Type	13A (BS 1362)	
Termination Type	Screw	
Terminal Size (mm)	5.7 x 4.8	Terminal Torque Value (Nm) 1.2
Terminal Capacity - Solid (mm²)	3 x 2.5 or 2 x 4	
Single Pole Switched	Yes	
Twin Earth Terminals	No	
Protocol	Zigbee	Signal Transmission Frequency 2.4GHz
Open Air Wireless Range (M)	<160	
Standby Current (mA)	1	
Indicator Colour	White & Orange	
Minimum Back Box Depth (mm)	25 (With Gasket) 35 (Without Gasket)	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	3	

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth.
Zigbee signal mesh
Enables manual control (unless locked), wireless control and automated control
Voice control via ClickSmart+ Hub using Alexa and/or Google Home

Components Supplied Smart Fused Connection Unit Gasket Fixing Screws Screw Caps Instruction Manual

Programming Information With hub and app setup and socket wired and powered, press the switch for five to ten seconds, the orange LED indicator starts flashing. Can be paired with hub via app.