



THE LATEST LEADING INNOVATION IN FIRE RATED DOWNLIGHTS

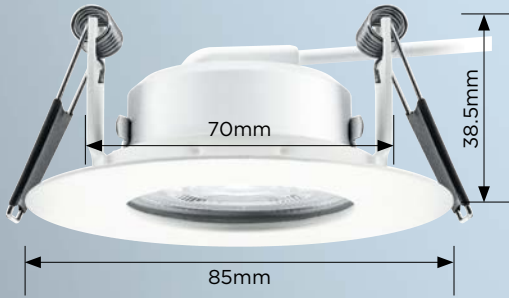

Evolight Lamp included

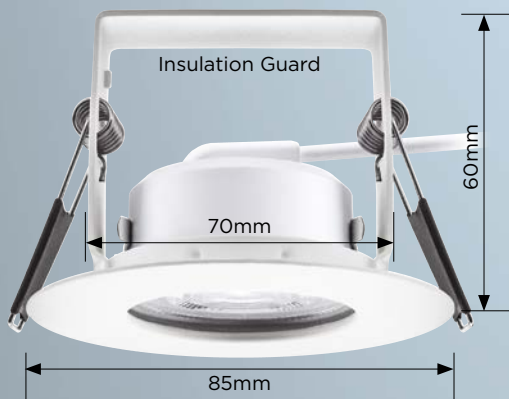

- Only 60mm high (with a built-in insulation guard) or 38.5mm super-low profile (without guard) - with replaceable lamp (Evolight) ideal for tight spaces
- Open design allows airflow to extend lamp life, compared to traditional designs
- Ultra-thin 1mm “blend-in” bezel with a premium finish for an attractive look in any room
- Easy installation – with a 28cm cable and Fast-Fit, loop-in/loop-out junction box for tool free assembly
- Lightweight Steel body, only 172g – easy to install & remove
- 70mm cut-out, 85mm diameter, IP65, dimmable



certification by UKAS Warringtonfire

ROUND WHITE

Product Code	Cut-out mm	IP	Watts W	CCT K	Lumens lm	Lumens per Watt	Beam Angle	Dimmable	Insulation Guard	Loop-in/out connector
ILD LFR70D031	70mm	IP65	3.8	2700	390	103	36°	Yes	-	Yes
ILD LFR70D032	70mm	IP65	3.8	4000	400	105	36°	Yes	-	Yes
ILD LFR70D022	70mm	IP65	3.8	2700	390	103	36°	Yes	Yes	Yes
ILD LFR70D023	70mm	IP65	3.8	4000	400	105	36°	Yes	Yes	Yes

ROUND SATIN NICKEL

Product Code	Cut-out mm	IP	Watts W	CCT K	Lumens lm	Lumens per Watt	Beam Angle	Dimmable	Insulation Guard	Loop-in/out connector
ILD LFR70D035	70mm	IP65	3.8	2700	390	103	36°	Yes	-	Yes
ILD LFR70D036	70mm	IP65	3.8	4000	400	105	36°	Yes	-	Yes
ILD LFR70D026	70mm	IP65	3.8	2700	390	103	36°	Yes	Yes	Yes
ILD LFR70D027	70mm	IP65	3.8	4000	400	105	36°	Yes	Yes	Yes

ROUND POLISHED CHROME

Product Code	Cut-out mm	IP	Watts W	CCT K	Lumens lm	Lumens per Watt	Beam Angle	Dimmable	Insulation Guard	Loop-in/out connector
ILD LFR70D033	70mm	IP65	3.8	2700	390	103	36°	Yes	-	Yes
ILD LFR70D034	70mm	IP65	3.8	4000	400	105	36°	Yes	-	Yes
ILD LFR70D024	70mm	IP65	3.8	2700	390	103	36°	Yes	Yes	Yes
ILD LFR70D025	70mm	IP65	3.8	4000	400	105	36°	Yes	Yes	Yes