

140 LUMENS PER WATT LED PANELS



Dimmable
Available



UV Stabilised
Diffuser



50,000 Hour
Life Time



Suspension
Brackets

ENERGY EFFICIENT


Lower wattages producing
higher lumen outputs!

**CCT & POWER SWITCHABLE
OPTIONS AVAILABLE**

LOW-GLARE AS STANDARD

Creating lighting suitable
for working environments.

**PRE-WIRED
FLOW™
CONNECTOR**

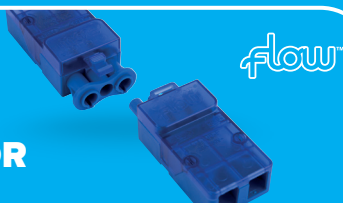

flow™

140
LM/W


5
YR
WARRANTY

IP44

INCEPTOR[®] SLATE BACKLIT

PRE-WIRED
flow
CONNECTOR

140 LM/W



**3 SIZES
AVAILABLE**

Completely customisable lighting is available with power and CCT switchable LED panels available in a white finish as standard.

OXS6X6 22-30W 600mm x 600mm Low Glare LED Panel

OXS12X3 22-30W 1200mm x 300mm Low Glare LED Panel


OXS12X6 37-50W 1200mm x 600mm Low Glare LED Panel



22W & 30W



22W & 30W

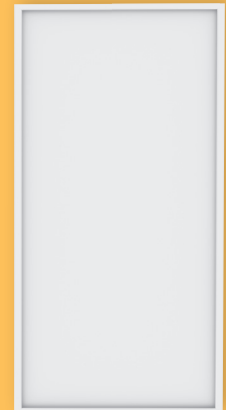

37W & 50W

SLATE BACKLIT

140 LM/W

PRE-WIRED
flow
CONNECTOR



4000K 600 x 600 22W LED panels available in a white finish as standard.

OXS22 22W 600 X 600 Low Glare LED Panel

EMERGENCY PACKS

OEP4
OEP4-ST




INSTALLATION OPTIONS

Recess Frames & Suspension Kits are also available.

OVSURF6X6 600mm x 600mm Surface Frame

OVSURF12X3 1200mm x 300mm Surface Frame

OVSURF12X6 1200mm x 600mm Surface Frame

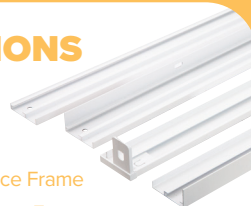

4000K 600 x 600 22W LED panels available in a white finish as standard.



OSA22 22W 600mm x 600mm TP(a) LED Panel



OSB22 22W 600mm x 600mm TP(b) LED Panel