


ShieldGLAND Pro M20S

ShieldGLAND Pro M20S Brass locknut, E-Spring, earth fly lead

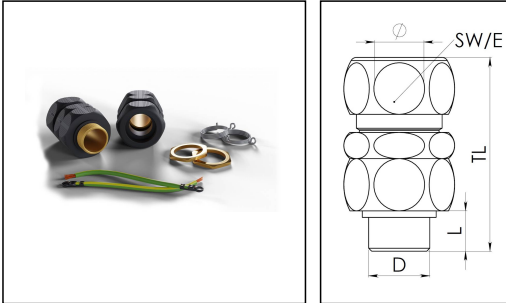

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material sealing gasket	TPE
Temp. range min	-40 °C
Temp. range max	120 °C
Protection class	IP68 (5 bar 30 min)
Thread type	M
Ø Connection thread D	20
Lead	1,5
Length screw-in thread L	11 mm
Ø cable diameter min	7 mm
Ø cable diameter max	16 mm
Ø cable below cable shield max	7 mm - 11 mm
Key width SW	27 mm
Collar diameter (E)	30 mm
Total length TL	57 mm - 63 mm
Type	ShieldGLAND Pro M20S
WISKA-Order no.	10112394
Packing unit	2

Remarks:

Complete with Brass locknut, E-Spring
and earth fly lead

18.03.2024


Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

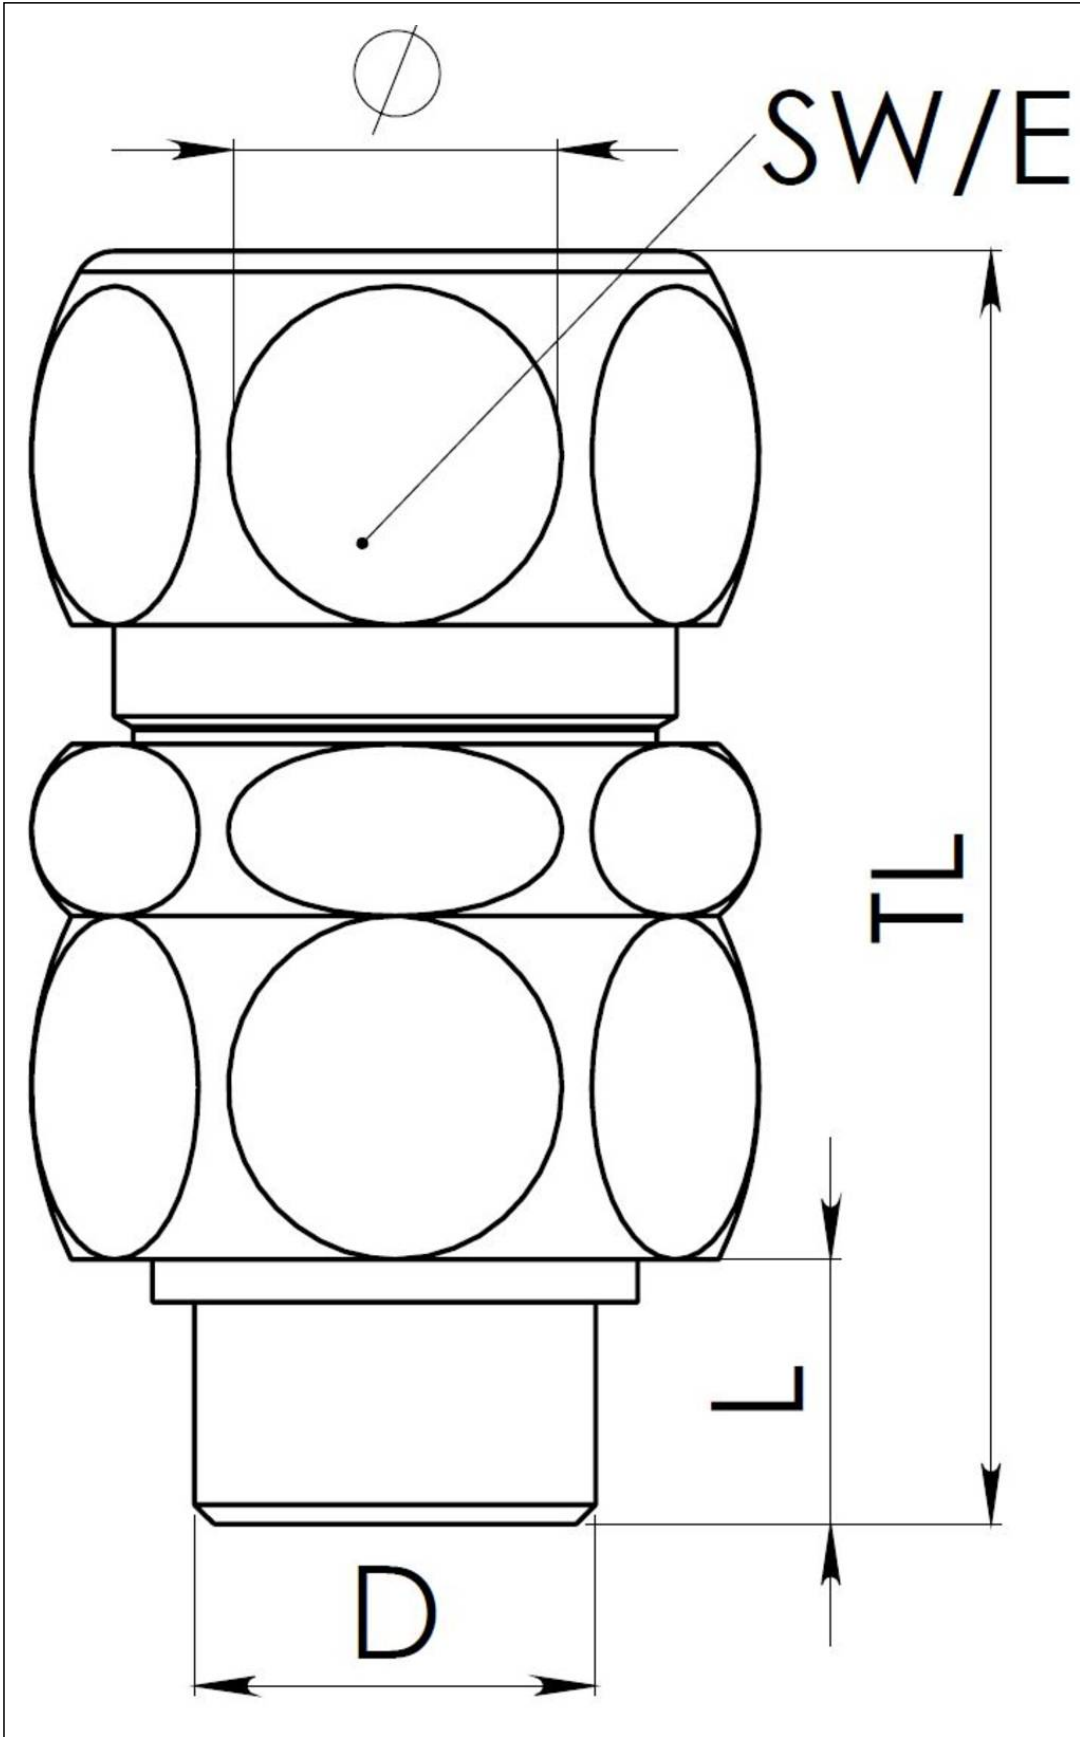

Your Contact:

WISKA UK Ltd.


Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

ShieldGLAND Pro M20L

ShieldGLAND Pro M20L Brass locknut, E-Spring, earth fly lead

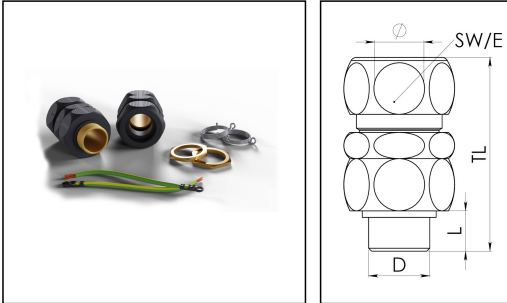

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material sealing gasket	TPE
Temp. range min	-40 °C
Temp. range max	120 °C
Protection class	IP68 (5 bar 30 min)
Thread type	M
Ø Connection thread D	20
Lead	1,5
Length screw-in thread L	11 mm
Ø cable diameter min	12 mm
Ø cable diameter max	21 mm
Ø cable below cable shield max	12 mm - 17 mm
Key width SW	32 mm
Collar diameter (E)	36 mm
Total length TL	57 mm - 63 mm
Type	ShieldGLAND Pro M20L
WISKA-Order no.	10112395
Packing unit	2

Remarks:

Complete with Brass locknut, E-Spring
and earth fly lead

18.03.2024


Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

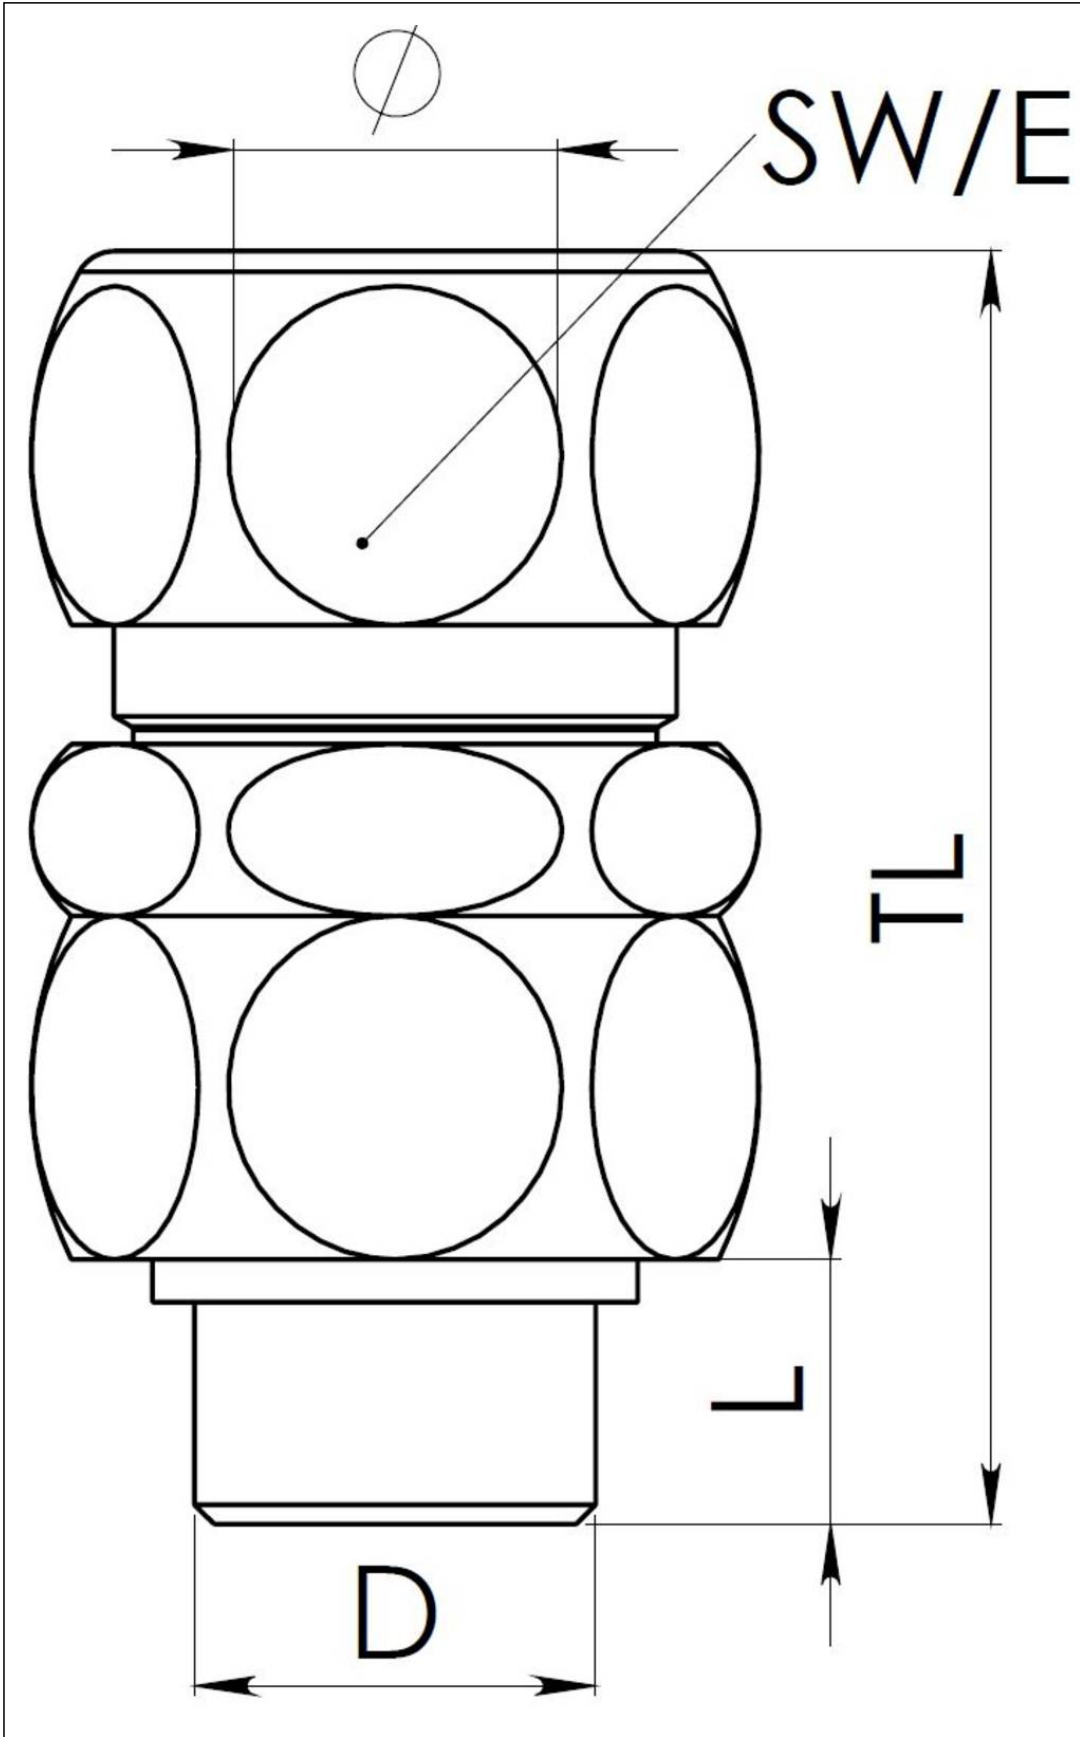

Your Contact:

WISKA UK Ltd.


Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

ShieldGLAND Pro M25

ShieldGLAND Pro M25 Brass locknut, E-Spring, earth fly lead

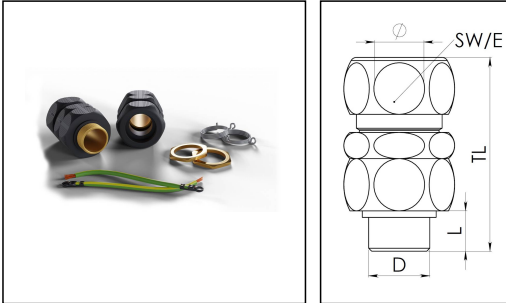

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material sealing gasket	TPE
Temp. range min	-40 °C
Temp. range max	120 °C
Protection class	IP68 (5 bar 30 min)
Thread type	M
Ø Connection thread D	25
Lead	1,5
Length screw-in thread L	13 mm
Ø cable diameter min	17 mm
Ø cable diameter max	28 mm
Ø cable below cable shield max	17 mm - 21 mm
Key width SW	41 mm
Collar diameter (E)	46 mm
Total length TL	61 mm - 68 mm
Type	ShieldGLAND Pro M25
WISKA-Order no.	10112396
Packing unit	2

Remarks:

Complete with Brass locknut, E-Spring
and earth fly lead

18.03.2024


Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

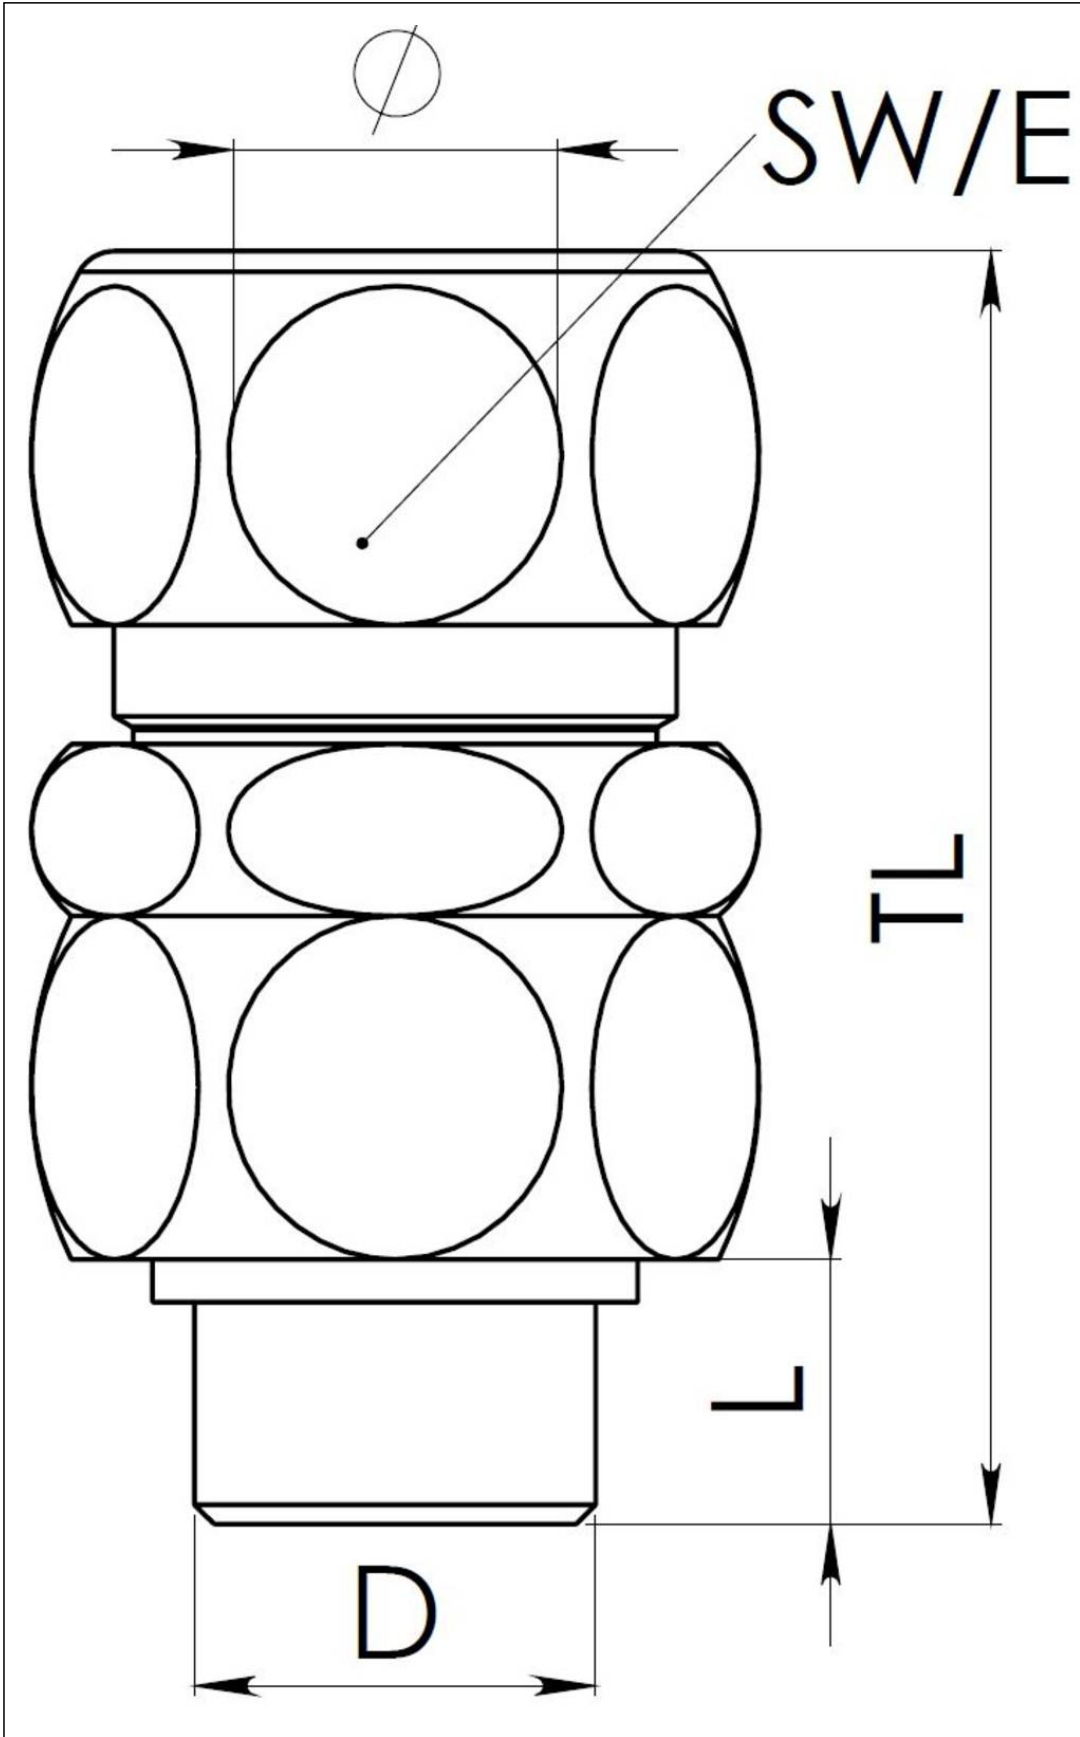

Your Contact:

WISKA UK Ltd.


Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

ShieldGLAND Pro M32

ShieldGLAND Pro M32 Brass locknut, E-Spring, earth fly lead

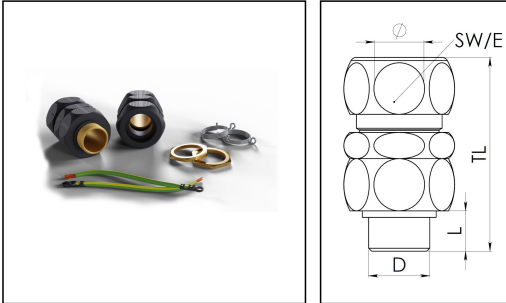

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material sealing gasket	TPE
Temp. range min	-40 °C
Temp. range max	120 °C
Protection class	IP68 (5 bar 30 min)
Thread type	M
Ø Connection thread D	32
Lead	1,5
Length screw-in thread L	13 mm
Ø cable diameter min	24 mm
Ø cable diameter max	36 mm
Ø cable below cable shield max	24 mm - 30 mm
Key width SW	50 mm
Collar diameter (E)	56 mm
Total length TL	66 mm - 74 mm
Type	ShieldGLAND Pro M32
WISKA-Order no.	10112397
Packing unit	2

Remarks:

Complete with Brass locknut, E-Spring
and earth fly lead

18.03.2024


Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

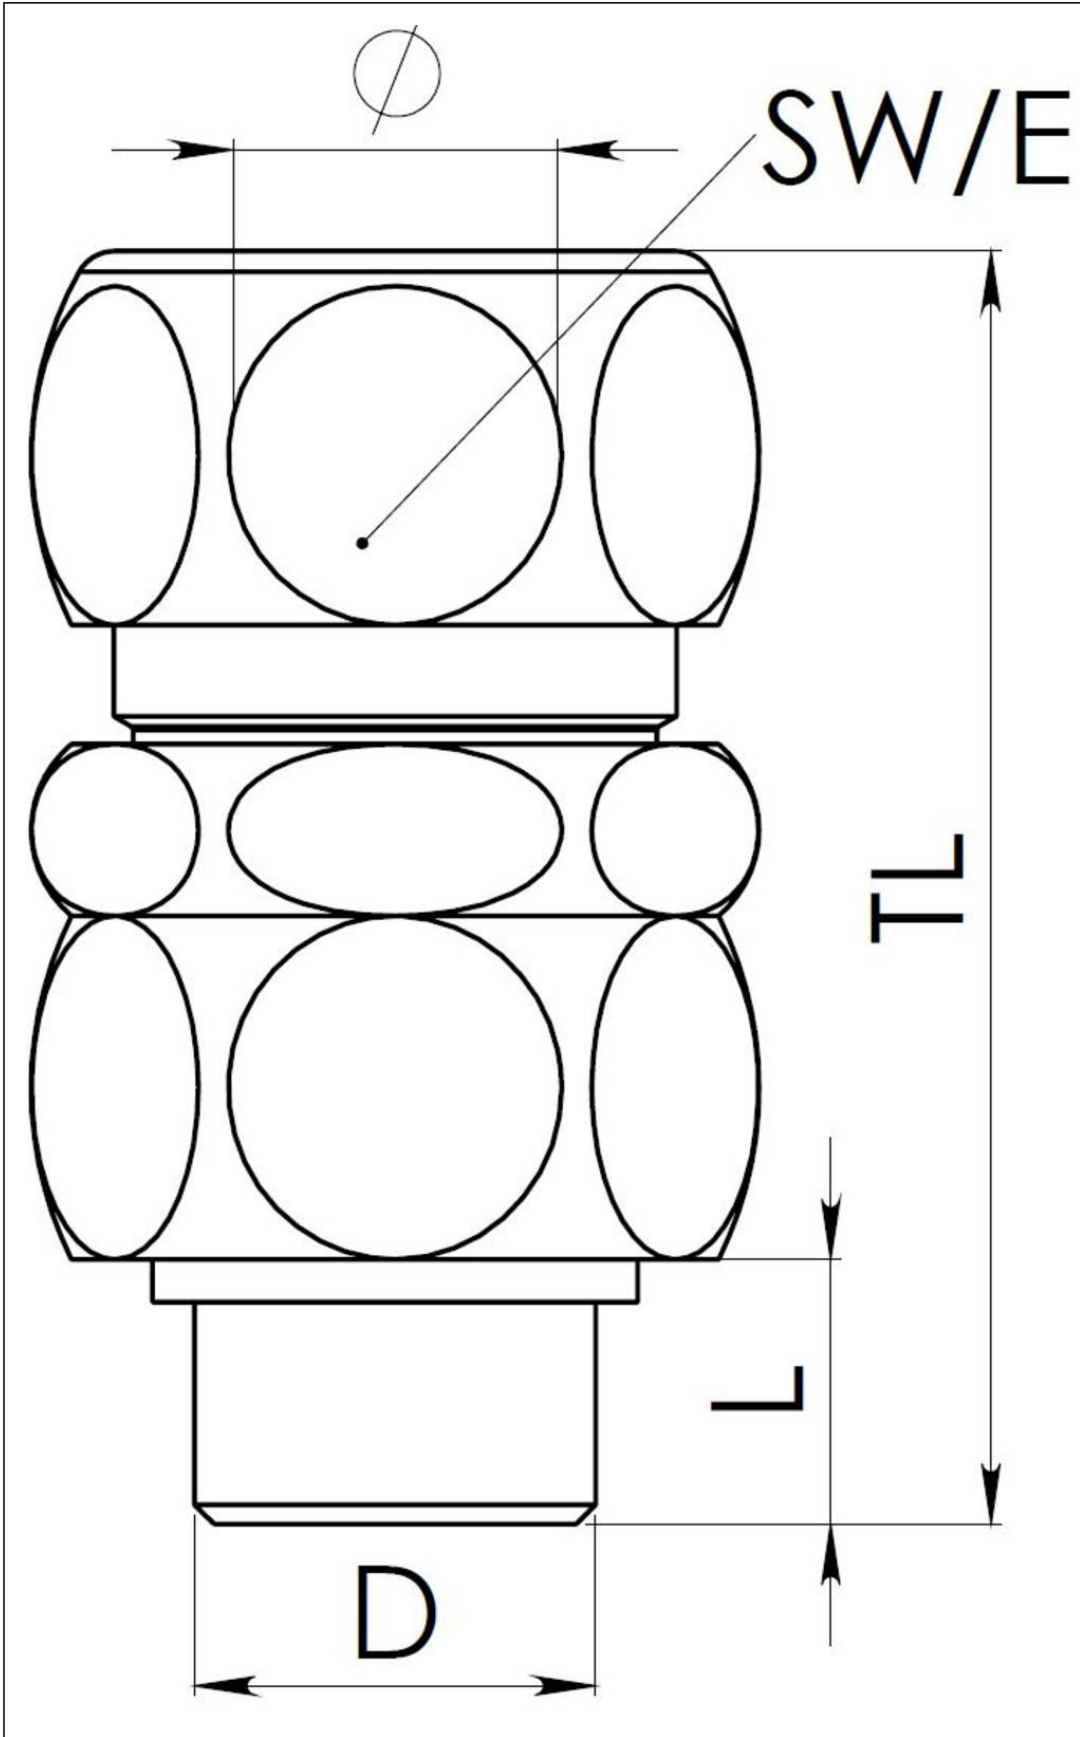

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk