

5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Meola

06830 MEO25-SCT

Meola, large LED bulkhead DIM 25W IP65 SCT

- Diameter of 420mm & 520mm
- Option of base with emergency module
- IP65 and vandal resistant (IK10)
- Integrated LED board for uniform light output
- High lumen output of up to 4000lm
- Flicker free
- DALI 3 in1 Dimmable version available
- Switchable CCT (3000K/4000K/5000K)



Overview

The Meola Bulkhead comes with an integrated LED board for uniform light output and switchable CCT. DALI/1-10v/Push dimmable version available. Microwave sensor and emergency versions are also available. With IP65 and IK10 rated for outdoor use and vandal resistant. The bulkhead offers a simple and elegant solution.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal and External

Technical Summary

Product Code	MEO25-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Default Power	25 W
Power Factor	0.90
Default CCT	4,000 K
Settable Colour Temperatures	3000k, 4000k, 5000k
SDCM of CCT	<6
CRI	≥82
Dimmable	N
Flicker	0.01%
Lumens Output Maximum	2,500 lm
Maximum Efficiency	100 lm/W
Emergency Luminous Flux	400 lm
L80B10 Lifetime (h) @Ta 25 °C	43,000 h
Nominal Lifetime (h)	50,000 h
Weight	1.59Kg
Dimensions (L x W x D) (mm)	85xØ420



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Meola




06830 MEO25-SCT

Accessories

Product Code	Description	Type
SUS04	LED Panel & Slim Line II suspension kit (4 cables per bag)	Suspension Kit
SUS04/25	Suspension kit 2.5m Alden & Nevis & Slim Line II (4 cables per bag)	Suspension Kit

Overview

The Meola Bulkhead comes with an integrated LED board for uniform light output and switchable CCT. DALI/1-10v/Push dimmable version available. Microwave sensor and emergency versions are also available. With IP65 and IK10 rated for outdoor use and vandal resistant. The bulkhead offers a simple and elegant solution.

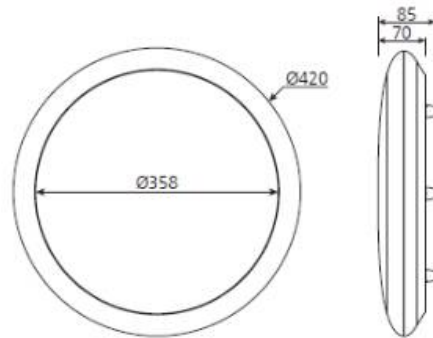

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal and External



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com