

Vega

06799 VEG1100-GRY

Vega, solar powered flood light 1100lm 110° Grey 6000K

- Provided with high output monocrystalline silicon solar panel
- Dusk to dawn & microwave sensor
- High efficiency upto 170lm/W
- Easy installation with no mains wiring required
- Solar panel and flood light can be installed up to 3m apart with option of extension cable

Overview

The Vega LED Floodlight uses an internal battery, recharged by the Monocrystalline silicon solar panel. With a built-in microwave sensor via a remote for setting. When detection mode is selected it will stay on at a dimmed level and raises to light level when motion is detected. Outdoor rated, simple to install with no external wiring.



IP65



General Information

Ambient Temperature Range (°C)	-10°C to 50°C
IP Rating	IP65
Protection Rating	Class III
Installation Area	External
L80B10 Lifetime (h) @Ta 25 °C	76,000 h

Technical Summary

Product Code	VEG1100-GRY
Default Power	7 W
Default CCT	6,000 K
CRI	>80
Dimmable	Y
Lumens Output Maximum	1,100 lm
Maximum Efficiency	157 lm/W
L80B10 Lifetime (h) @Ta 25 °C	76,000 h
Nominal Lifetime (h)	50,000 h
Weight	2.19Kg
Dimensions (L x W x D) (mm)	261x228x45
Beam Angle - Lumi (°)	90

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Vega

06799 VEG1100-GRY

Optional Gear

Product Code	Description	Type
VEGBAT-1100	Vega battery LiFePO4 3.2V 20000mAh	Battery

Accessories

Product Code	Description	Type
VEG-CAB-3M	3.0M H05W-F 2x1.0mm2 cable for Vega	Cable
VEG-CAB-2M	2.0M H05W-F 2x1.0mm2 cable for Vega	Cable
VEG-CAB-1M	1.0M H05W-F 2x1.0mm2 cable for Vega	Cable


Overview

The Vega LED Floodlight uses an internal battery, recharged by the Monocrystalline silicon solar panel. With a built-in microwave sensor via a remote for setting. When detection mode is selected it will stay on at a dimmed level and raises to light level when motion is detected. Outdoor rated, simple to install with no external wiring.



General Information

Ambient Temperature Range (°C)	-10°C to 50°C
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class III
Installation Area	External

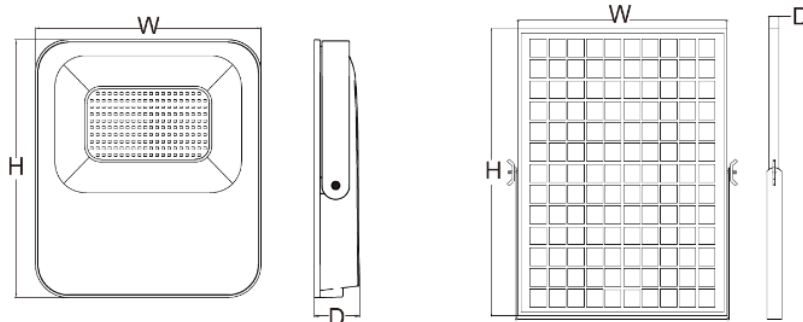

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

