

GROUND LIGHTS SPECIFICATION SHEET



COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

/collingwoodlighting

/collingwoodlighting

collingwoodled

GL08

17W, 1,390lm drive over ground light

FEATURES

IK rating	IK10
IP rating	IP67
Colour flexibility	Fixed colour
Tilttable	20°
Walk Over / Drive Over	Drive over (15mph maximum)
Input	220-240V 50/60Hz
LED Lifetime	70,000h L70 B10
CRI	>80Ra
SDCM	3SDCM

INSTALLATION INFORMATION

Bathroom zone	2
Inrush Current	1.8A 0.2ms
Construction Material	Stainless Steel 316 (cover ring) / Aluminium (body)
Weight	4.1Kg
Maximum ambient temperature	40°C
SELV	Yes
Electric Class (1, 2, 3)	1

GUARANTEE / WARRANTY

5 year extended warranty

FEATURES & BENEFITS

- Adjustable LED fittings
- High light output of 1390 lumens
- Straight to mains
- Robust cable for outdoor use
- Installation tube included
- 10mm toughened glass, ideal for use in driveways

PHOTOMETRICS @ 25°C

Product code	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
GL08D60X40	17W	4000K	60°	1390	82	801
GL08D38X40	17W	4000K	38°	1390	82	2286
GL08D24X40	17W	4000K	24°	1390	82	3533
GL08D60X30	17W	3000K	60°	1390	82	793
GL08D38X30	17W	3000K	38°	1390	82	2264
GL08D24X30	17W	3000K	24°	1390	82	3498
GL08D60X27	17W	2700K	60°	1360	80	776
GL08D38X27	17W	2700K	38°	1360	80	2207
GL08D24X27	17W	2700K	24°	1360	80	3410

WIRING INFORMATION

Cable / Flying Lead	1m H05RN-F rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel


LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (driver built in)	220-240V	N/A	No	2	-	-

ACCESSORIES

Installation tube (included)	
JB5	Gel filled waterproof connector
WC 5-9	Quick waterproof connector

Beam angles: 24° 38° 60°

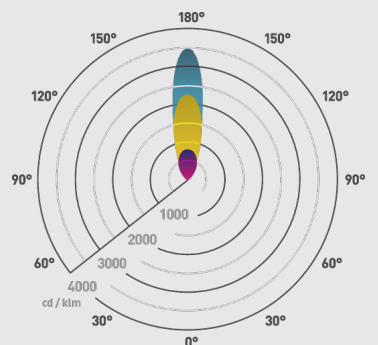

Ø225/212mm

