

SMART GU10 BULB 350LM 4.9W RGBW 2700K to 6500K TUYA CONTROL 100 BEAM INTEGRAL

ILGU10DL133



Effortlessly transform your room with Integral Smart Light GU10. This is the ideal GU10 for a space that requires both retrofit lighting and mood lighting so you are able to adjust the tone in your room to match the activity. Control your lighting with smart device via WiFi Tuya Smart app which allows you to switch the light on or off, change the colours or simply choose white light you need from colour temperature 2700K to 6500K, and adjust the brightness. Advanced features available include scheduling options, music sync with adjustable sensitivity and multiple extra running modes.

Details

Quick Order Code:	'043337
Barcode:	5055788278573
Category:	Lamps
Range Name:	Smart Light
Product Type:	GU10
Product Body Finish:	Matt white
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	58
Product Width (mm):	50
Product Weight (g):	32
Optic:	Frosted lens
Material:	Aluminium and plastic
Base Term:	GU10
Bulb Base:	GU10
Construction:	Plastic and Aluminium heat-sink, Injection moulded diffuser
Globe Finish:	Frosted
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting
Spot Type:	SMD

Electrical Data


Power (W):	4.9
Power Consumption (W) :	4.9
Power Factor:	0.5
Voltage Range (v):	220-240
Wattage equivalent (W):	32
Amperage (mA):	34 to 43
Dimming:	Dimmable via Tuya app control
Driver Included:	Yes
Electric Current:	AC
True Wattage Eq (W):	32
EN:	EN-62560, EN300328
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	350
Luminous efficacy (lm/W):	71
Correlated Colour Temperature (CCT) (K):	2700-6500
Colour Temperature:	RGB+W Tunable
Colour Temperature Name:	RGB+W
Beam Angle:	100
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	15000
Switching Cycles:	50000

Environment

EN:	EN-62560, EN300328
LVD Certified:	Yes
CE RoHS:	Yes
Previous Energy Rating:	A+
New Energy Rating:	G
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-15
Maximum Operating Temperature (°C):	45

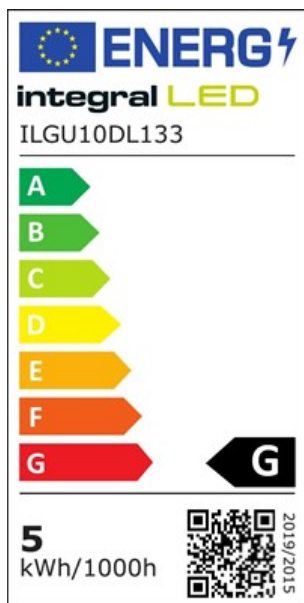

Packaging

Package Weight (g):	42
Package Length (mm):	50
Package Width (mm):	50
Package Depth (mm):	50

[Portal.integral-led.com](https://portal.integral-led.com)