

# HIGH BAY SPECIFICATION SHEET



**COLLINGWOOD  
LIGHTING**

01604 495 151  
collingwoodlighting.com

@collingwoodLED

/collingwoodlighting

collingwoodled

## Springbok High Bay 200W

140lm/W for excellent payback, 1-10V dimmable as standard, 200W LED High Bay

### FEATURES

Wattage	200W
IP rating	IP65
IK rating	IK08
Input	Mains AC
Dimmable	Yes (1-10V)
LED lifetime	50,000h (L70, B10)
SDCM	5SDCM
UGR rating	36.8

### INSTALLATION INFORMATION

Inrush current	45A Max
Construction material	Magnesium Alloy
Weight	4.20Kg
Maximum ambient temperature	50°C

### GUARANTEE / WARRANTY

5-year warranty available

### FEATURES & BENEFITS

Black magnesium alloy design for excellent heat dissipation

Robust and can withstand tough environments

A range of accessories available

140lm/W - for excellent payback

IP65

1-10V dimmable as standard

### PHOTOMETRICS @ 25°C

Product code	Finish	Colour	Beam angle	lm	lm/W	Lx at 1m
HB20040	Black	4000K	120°	28,000	140	9909

### WIRING INFORMATION

Cable / flying lead	3x 1.0mm <sup>2</sup> 1 Metre
Type of wiring required	Parallel (mains) 220-240V AC 50/60Hz


### LED DRIVERS

Product code	Input	SELV	Dimming
N/A (integrated SELV driver)	220-240V	SELV	Yes (1-10V as Standard)


### ACCESSORIES

HBA60	High Bay Accessory - 60° reflector, Accessory for all size High Bays
HBA90	High Bay Accessory - 90° reflector, Accessory for all size High Bays
HBA70	High Bay Accessory - 70° refractor, Accessory for all size High Bays
HBAS	High Bay Accessory - Microwave sensor, Accessory for all size High Bays

Beam angle: 120°

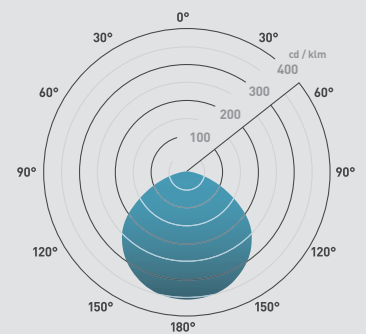

Ø300mm



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

**A+**  
**A+**  
**A**  
**C**  
**D**  
**F**

**LED**

874/2012