


13A Socket Outlets

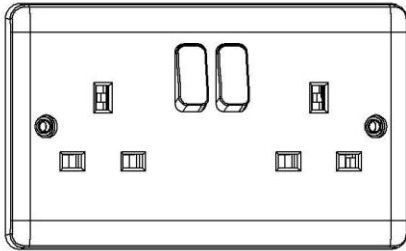

Description

A range of 1g and 2g socket outlets with either single or double switches, or unswitched.

This uniquely shaped range is easy to install, with clear bold terminal markings and is supplied in individual protective bags suitable for display.

Features

- Contemporary designed profile
- Convex rockers
- Only one size 4mm screwdriver needed
- Terminals have clear bold markings
- Top facing terminal screws
- DP switch versions
- 2 earth terminals on DP sockets
- Terminals have large lead-ins
- 25-year guarantee

Range

1g unswitched	VC1206
2g unswitched	VC1208
1g standard SP switch	VC1207S
1g recessed SP switch	VC1207R
2g standard SP switch	VC1209S
2g recessed SP switch	VC1209R
1g standard DP switch	VC1207SDP
2g standard DP switch	VC1209SDP

Technical Specification

Voltage rating	250Vac
Current Rating	13A per outlet
Contact gap	3mm
Frontplate material	Urea formaldehyde

Urea flammability classification UL94 grade V-0

No user serviceable parts

Back Boxes

Minimum recommended depth

	Flush	Dry lining	Surface
	25mm	35mm	25mm
1g	DB162	DB2540	V1221
2g	DB163	DB2541	V1223

Standards

- BS 1363 Part 2 : 1995

Terminal Capacity

	2.5mm ²	4mm ²	6mm ²	10mm ²
L & N	4	3	2	1