

Product SKU

Product Name

RRP

Product Images

Tag Line

Key Features

Consumer & Installer

Dates

Launch


Available for Sale

Works with

LP81

Lightwave Smart Relay with Switch Sense Input

£69.95

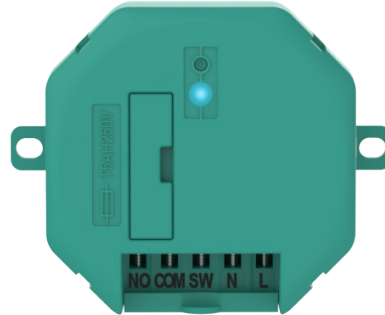

## Technical Information

Product Dimensions  
53 x 27 x 68 mm

Product Weight  
110g

RF Frequency  
868MHz

Smartphone compatibility  
iOS & Android

Power Supply  
230V ~ 50Hz

Output rating:  
700W

- Smart Relay works as a normal On/Off relay for non-dimmable loads up to 700W, suitable for 6 amp circuit
- Switch loads of up to 700W. The switched circuit can be mains powered or volts free (low voltage). Mains power can also be taken from the Relay itself to power the circuit (see wiring instructions for more information)
- Voice-control compatibility with Amazon Alexa, Google Assistant & Siri through the Apple HomeKit platform\*
- Create timers, scenes, triggers and other automations
- Switch Sense Input allows you to trigger Lightwave and third-party automations from these non-smart devices; standard light switch (Toggle Mode in the app), push button switch (Retractive Mode in the app), pull-cord switch in bathrooms
- Switch Sense Input in mains referenced and must be treated as mains voltage at all times
- If using the Switch Sense Input with the following devices; smoke detector, heat sensor, wired motion sensor, legacy control systems and diverter valve position, they must have a Switched Line Output
- Requires mains power

\*Lightwave Link Plus and WiFi router with broadband internet connection required

September 2022

August 2022

