

ANDRIS LUX ECO

ELECTRIC STORAGE WATER HEATER

HOT WATER | HEATING | RENEWABLES ariston.com/uk

ANDRIS LUX ECO FEATURES AND BENEFITS



The Andris Lux Eco is a small unvented electric water heater, encompassing leading Italian design, energy efficiency and durability.

This unrivalled model boasts new features to enhance usability and safety, as well as an industry-leading 4-year warranty. Available in 10, 15 and 30 litre versions, each unit offers fast reheat times and can be installed in 10 simple steps.







7AM

- / 'A' Class ErP rating across all models
- / Copper heating element (Nickel free)

KEY FEATURES:



remembers when and how much hot water you use. Without any effort, you can have the hot water you need, when you need it.





ABS SAFETY SYSTEM

A set of functions, including Anti-Overheating, Anti-Freezing and Dry Heating Self-Diagnosis, which protect the unit in case of energy or water failures.



ANTI-LEGIONELLA

Once a month, the Andris Lux Eco automatically increases the water temperature up to 65°C, in order to eliminate the risk of legionella bacteria developing. Ideal for applications such as hospitals, schools and care homes.

OTHER FEATURES:



TITANIUM ENAMELLED TANK

/ With its proprietary titanium tank engineering, the Andris Lux Eco boasts exceptional durability and an extended product life.



'A' CLASS ENERGY RATING

/ With an unrivalled 'A' Class energy rating, the Andris Lux Eco provides the very best product performance on the market.



ECO DISPLAY

/ The unit's smart, user-friendly display is easy to use and provides precise electronic temperature control.



ENHANCED ANTI-CORROSION

/ With its robust 4 bolt flange and copper heating element, the Andris Lux Eco offers improved protection against water corrosion.




ITALIAN DESIGN


Designed by Umberto Palermo, the Andris Lux Eco's modern, elegant and cutting edge new design offers a sophisticated look and easy installation.




ANDRIS LUX ECO ELECTRIC WATER HEATER

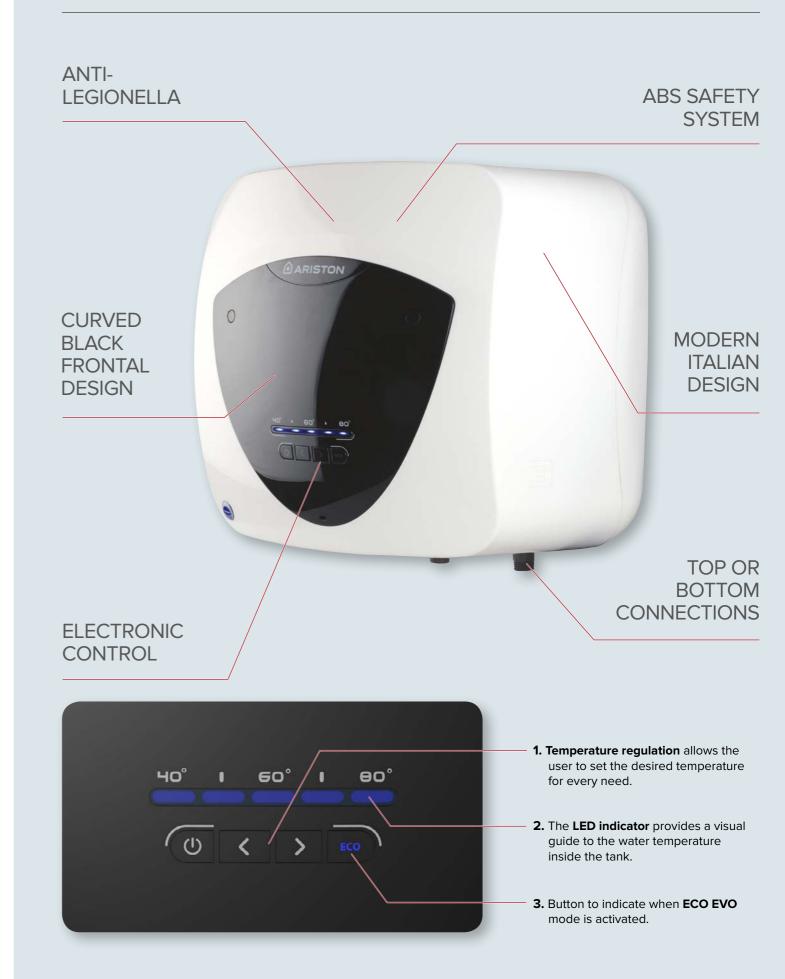

PRODUCT DIMENSIONS





| | 10L (Under & Oversink) 2.5kW | 15L (Under & Oversink) 2.5kW | 30L (Oversink) 2.5kW |
|---|------------------------------------|------------------------------------|----------------------------|
| А | 360mm | 360mm | 446mm |
| В | 360mm | 360mm | 446mm |
| С | 294mm | 342mm | 406mm |
| D | 385mm | 385mm | 475mm |
| | | | |

LEGEND

Cold water inlet G 1/2"

O Hot water outlet G 1/2"

| Description | 10L O 2.5kW | 10L U 2.5kW | 15L O 2.5kW | | 30L O 2.5kW |
|-------------------------|----------------|----------------|----------------|-----------|---|
| Туре | Unvented | Unvented | Unvented | Unvented | Unvented |
| Capacity (Litres) | 10 | 10 | | | 30 |
| Installation | Oversink | Undersink | Oversink | Undersink | Oversink |
| ErP Class | | | | | |
| Element Rating (kW) | 2.50 | 2.50 | 2.50 | 2.50 | 2.50 |
| Tapping Profile | XXS | XXS | XXS | XXS | |
| Heating Time (min) | 14 | | 21 | 21 | |
| Unit Weight (kg) | 6.7 | 6.7 | 7.5 | 7.5 | 11.2 |
| Standing Loss (kWh/24h) | 0.46 | 0.71 | 0.61 | 0.85 | 0.75 |
| PRODUCT CODES | 3100717 | 3100718 | 3100721 | 3100722 | 3820018 Including kits A, B & C |

INSTALLATION KITS:

IN ORDER TO FIT AN ARISTON ANDRIS LUX ECO, IT IS GOOD PRACTICE AND SOMETIMES MANDATORY TO INSTALL ONE OR SEVERAL OF THE FOLLOWING KITS:



KIT A Expansion Vessel & Non-return Valve

The expansion vessel prevents any build-up of pressure within the domestic hot water system, while the non-return valve stops any backflow of hot water into the cold water main.

PRODUCT CODE: 406801



KIT B 3.5 Bar Pressure Reducing Valve

The maximum cold water inlet pressure designed for the Andris unit is 3.5 bar. Therefore, this pressure reducing valve controls the water to not exceed this limit.

PRODUCT CODE: 406802



KIT C

Discharge Tundish In the event the hot water system over pressurises, water is discharged via the 6 bar pressure relief valve and the tundish visually indicates a discharge is occuring.

PRODUCT CODE: 406807

HOT WATER I HEATING I RENEWABLES

Customer Service: customer.service.uk@aristonthermo.com | 0333 240 8777 Sales: salesoffice@aristonthermo.com | 0333 240 6666

ariston.com/uk











