

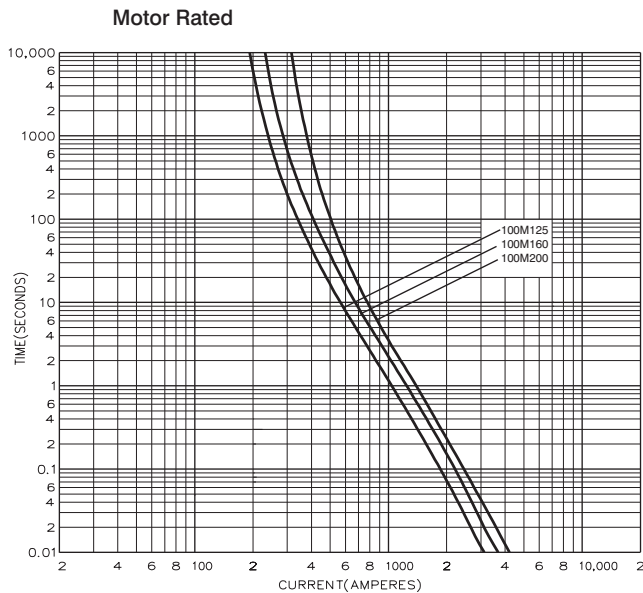


BS88, IEC269 Industrial HRC Fuse Links

Offset Bolted Tags 550V ac and Motor Rated 415V ac


CEO

Time-Current Characteristic Curves

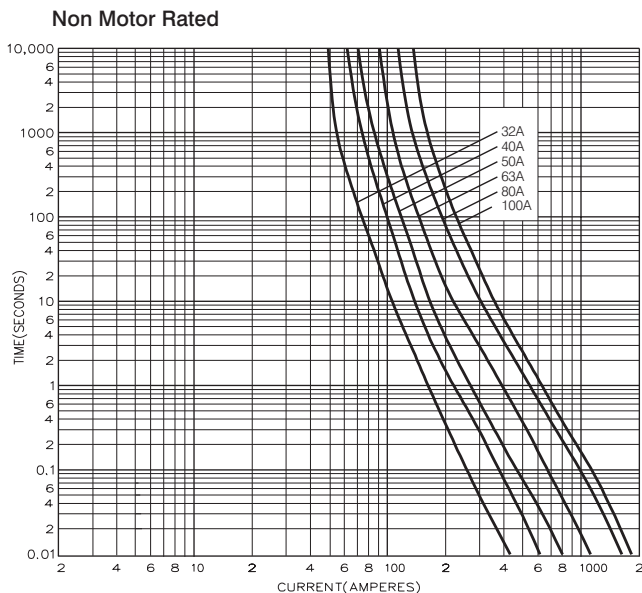

Offset Bolted Tag

Dimensional Data

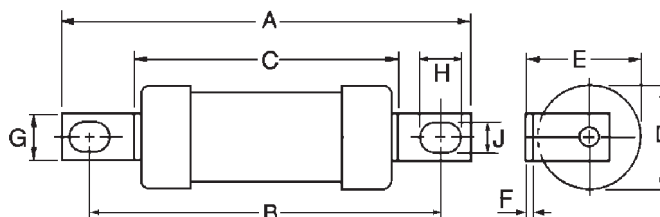

| Catalog' Number | I ² t (Amps ² Seconds) | | | Nom. Watts Loss | Rated Voltage | Dimensions (mm) | | | | | | | | | |
|-----------------|--|------------|---------------|-----------------|---------------|-----------------|------|------|------|------|-----|------|------|-----|------|
| | Amp Ratings | Pre-Arcing | Total at 415V | | | A | B | C | D | E | F | G | H | J | |
| CEO32 | 32 | 1000 | 2760 | 3.5 | 550 ac | 110 | 94.0 | 58.5 | 21.0 | 24.5 | 3.2 | 14.3 | 11.0 | 8.7 | |
| CEO40 | 40 | 1400 | 3750 | 4.7 | | | | | | | | | | | |
| CEO50 | 50 | 3000 | 8350 | 4.9 | | | | | | | | | | | |
| CEO63 | 63 | 7000 | 18,800 | 5.6 | | | | | | | | | | | |
| CEO80 | 80 | 13,000 | 35,200 | 7.2 | | | | | | | | | | | |
| CEO100 | 100 | 25,000 | 76,500 | 8.5 | | | | | | | | | | | |
| CEO100M125 | 100M125 | 57,000 | 150,000 | 6.5 | 415 ac | 110 | 94.0 | 58.5 | 25.8 | 26.8 | 3.2 | 14.3 | 11.0 | 8.7 | |
| CEO100M160 | 100M160 | 72,500 | 190,000 | 5.0 | | | | | 19.0 | 10.0 | | | | | 9.0 |
| CEO100M200 | 100M200 | 120,000 | 290,000 | 3.5 | | | | | 54.5 | 31.0 | | | | | 29.5 |

Packaging - 10 per carton except CEO100M200 which is packed 5 per carton

This bulletin is intended to clearly present product data and provide technical information that will help the end user with design applications. If there is any information that you require that is not recorded on this Data Sheet, please call our Application Engineers at Bussmann UK. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Bussmann Division
Cooper (U.K.) Ltd
 Burton-on-the-Wolds
 Leicestershire, LE12 5TH
 United Kingdom
 Tel: (44) (0)1509 88 27 37
 Fax: (44) (0)1509 88 27 86

Head Office
 St. Louis, MO, U.S.A. Tel: (314) 527-3877 Fax: (800) 544-2570 International Fax: (314) 527-1445



Bussmann Information Fax (00 1) 314 527 1450

Bussmann WEB site - <http://www.bussmann.com>