



TC Two Part Two Hole Fixing


Cable Cleats

The TC range is manufactured in polypropylene, a plastic which has high electrical resistance, excellent tensile strength and stability at high and low temperatures. An ideal clamp where there is a highly corrosive atmosphere. Manufactured in black to minimise possibility of U.V damage.

The two part range for cables 50mm - 85mm diameter is intended to augment our range of single fixing cleats which accommodate cable from 5.0mm in overall diameter to 50.8mm in overall diameter.

Features

- Manufactured in high strength polypropylene not polyethylene
- High impact resistance
- Unaffected by corrosive environments
- Higher mechanical strength than polyethylene
- High level of resistance to ultra violet light
- Stability down to -35°C and up to 105°C constant
- Supplied - one cleat per pack

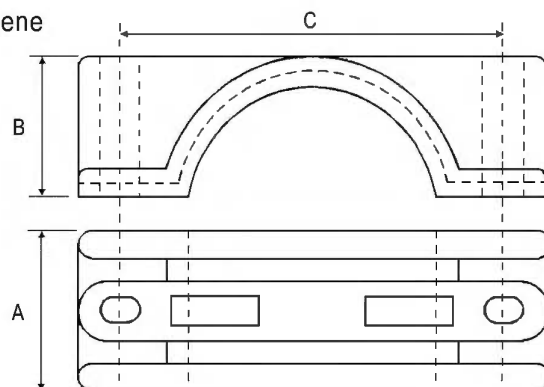

Part No.	Cable Diameters mm		Dimensions mm			Clearance Bolt Holes
	Min	Max	A	B	C	
TC8	41.0	48.0	59.0	31.0	75.0	2 x 10mm
TC9	48.0	57.0	60.0	32.0	76.2	2 x 10mm
TC10	57.0	64.0	60.0	35.0	76.2	2 x 10mm
TC11	64.0	70.0	62.5	40.0	114.3	2 x 10mm
TC12	70.0	76.0	62.5	44.0	114.3	2 x 10mm
TC14	76.0	85.0	63.5	46.5	114.3	2 x 10mm

LSF: Low Smoke Halogen Free & Fire Retardent Cleats available on request.
Larger sizes available.